




Made in China

## SAFETY INSTRUCTIONS

- ① Please read the instructions carefully before using
- ① Do not disassemble or refit the products.
- ① Press touch sensor button properly.
- ① Keep the mirror dry, moisture reduces the sensitivity of the product.
- ① Turn off the power before cleaning. The surface of the mirror should be cleaned with glass cleaner, please make sure the mirror is completely dry before using.
- ① Turn off the power and avoid direct sunlight if not used or stored for a long time. Far away from children's access.
- ① Make sure that your charging device is adequate for the mirror voltage rating before using.
- ① Do not approach or put the product into the fire in case of fire or explosion.
- ① Stop using it immediately if abnormal condition occurs.

# WALL-MOUNTED LED BATHROOM MIRROR


## OPERATION MANUAL

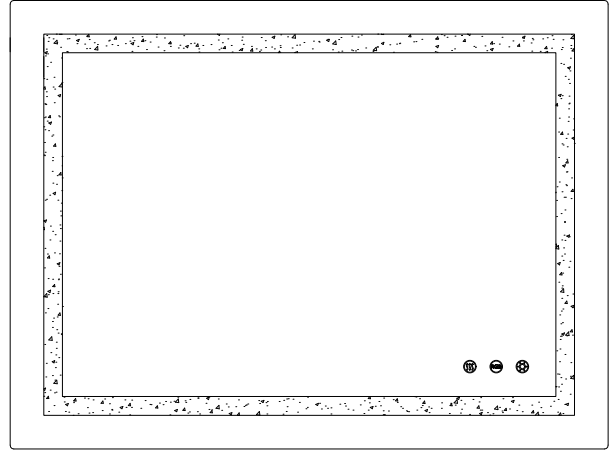

## SPECIFICATIONS

Beliani(International) Gmbh ITEM NO.:36094  
 Haldenstrasse 5  
 6340 Baar  
 Switzerland

INPUT:AC220V,50/60HZ  
 Power:75W+10%  
 LED Mirror

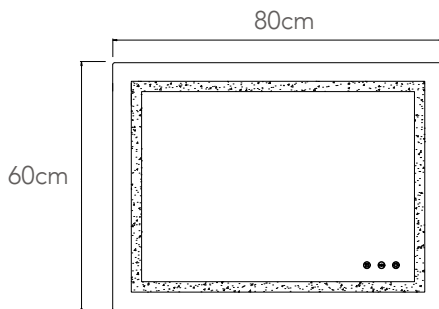

## PACKING LIST








LED Bathroom Mirror



Instruction Manual

## OPERATING INSTRUCTIONS



- (1) Pls use standard plug to connect with power directly.
- (2) When the plug is connected to the power correctly, the buttons will turn light on in white.
- (3) Press  to turn on the white light. Short press again, the light will change from cool white, warm white and natural white. Short press again to turn off the white light.
- (4) When any white color light is on, long press  to adjust the brightness.
- (5) Press  to turn the RGB lights on. You can switch the RGB light colors and modes by short press .
- (6) Press  to turn on/off the defogger pad.
- (7) Unplug when it is not used.

\* We reserves the right of any modification of the product involving design and specification, all the materials here are for your reference only and are subject to the products you received. No further notice be given for any technical parameters changed.